

Rigging Screws

HASSELFORS


Our stainless steel classics

Hasselfors rigging screws are made from high-grade, marine stainless-steel - SS2343 (AISI 316L. Carbon content max 0.03% molybdenum content 2.5-3.0%). The rigging screws have cold rolled threads and are polished for higher corrosion resistance. They come with a choice of locking devices - NLS (locking screw) and SP (split pin).*

The rigging screw threads are lubricated with Hasselfors rigging screw oil prior to delivery. To keep your rigging screws in good condition, please lubricate them regularly with our special rigging screw oil.

* **Split pins fitted as standard** - please specify 'NLS' if locking screws are required.

Fork & Fork

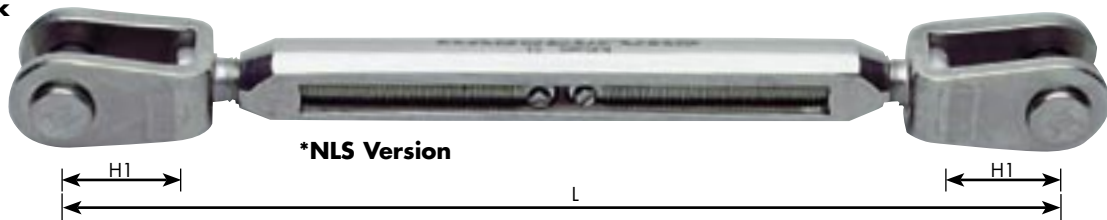

Part No.	Thread UNF	min. mm	Length body	Width body	max. mm	Weight g	Clevis pin diameter mm	Fork Depth mm	Fork Height mm(H1)	Breaking point kN	Max. Working load kN
HF-80001	1/4	130	92	9.5	187	96	6.5	7	12.5	15	10.5
HF-80002	5/16	156	111	11	222	160	8	8	15	23	16.1
HF-80003	3/8	188	128	12	266	256	9.5	10	18	34	23.8
HF-80004	7/16	225	150	15	320	440	11	12	18	47	32.9
HF-80005	1/2	250	166	17.5	360	620	13	14	24	68	47.6
HF-80006	5/8	270	175	21	380	1045	15.8	16	31	95	66.5
HF-80007-2	3/4	312	212	24	453	1600	19	20	32	125	87.5
HF-80008-2	7/8	440	292	34	620	3200	22	22	45	180	125
HF-80009	M24	570		38	820		22	25	50	250	175

Fork & Stud



Part No.	Thread UNF	Wire dia mm	min. mm	Length max. mm	Clevis pin diameter mm	Fork Width mm	Fork Height mm(H1)	Breaking point kN	Max. Working load kN
HF-81113	1/4	3	178	235	6.5	7	12.5	15	10.5
HF-81114	1/4	4	182	239	6.5	7	12.5	15	10.5
HF-81115	5/16	4	200	266	8	8	15	23	16.1
HF-81116	5/16	5	220	286	8	8	15	23	16.1
HF-81118	3/8	5	258	336	9.5	10	18	34	23.8
HF-81120	3/8	6	265	343	9.5	10	18	34	23.8
HF-81122	7/16	6	285	380	11	12	18	47	32.9
HF-81123	7/16	7	293	388	11	12	18	47	32.9
HF-81125	1/2	7	315	425	13	14	24	68	47.6
HF-81126	1/2	8	320	430	15.8	16	24	95	66.5
HF-81128	5/8	10	330	440	15.8	16	31	95	66.5
HF-81129	5/8	10	350	460	15.8	20	31	125	87.5
HF-81130-2	3/4	12	395	536	19	20	32	125	87.5
HF-81131-2	3/4	12	430	571	19	20	32	125	87.5
HF-81132-2	7/8	12	538	718	22	22	45	180	125
HF-81133-2	7/8	14	552	732	22	22	45	180	125