

HASSELFORS

Stainless steel rigging screw

Togglefork & Fork




Part No.	Thread UNF	min. mm	Length max. mm	Clevis pin diameter mm	Fork Width mm	Fork Height mm(H1)	Toggle Height mm(H2)	Breaking point kN	Max. Working load kN
HF-86071	1/4	140	197	6.5	7	12.5	15	15	10.5
HF-86072	5/16	165	231	8	8	15	19	23	16.1
HF-86073	3/8	195	273	9.5	10	18	22	34	23.8
HF-86074	7/16	232	327	11	12	18	23.5	47	32.9
HF-86075	1/2	260	370	13	14	24	30	68	47.6
HF-86076	5/8	293	403	15.8	16	31	39.5	95	66.5
HF-86077-2	3/4	332	473	19	20	32	40.5	125	87.5

Togglefork & Stud



Togglefork & Body Only

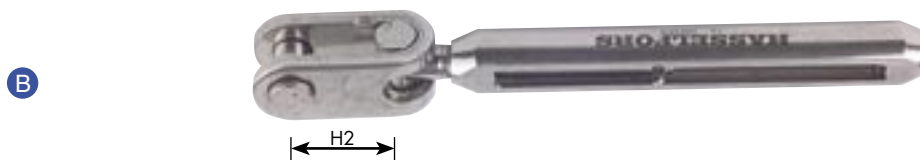

Part No. A	Thread UNF	Wire dia mm	min. mm	Length max. mm	Clevis pin diameter mm	Fork Width mm	Toggle Height mm(H2)	Breaking point kN	Max. Working load kN	Part No. B
HF-86043	1/4	3	185	242	6.5	7	15	15	10.5	HF-86740
HF-86044	1/4	4	190	247	6.5	7	15	15	10.5	HF-86740
HF-86045	5/16	4	208	274	8	8	19	23	16.1	HF-86741
HF-86046	5/16	5	228	294	8	8	19	23	16.1	HF-86741
HF-86048	3/8	5	255	333	9.5	10	22	34	23.8	HF-86742
HF-86050	3/8	6	262	340	9.5	10	22	34	23.8	HF-86742
HF-86052	7/16	6	292	387	11	12	23.5	47	32.9	HF-86743
HF-86053	7/16	7	300	395	11	12	23.5	47	32.9	HF-86743
HF-86055	1/2	7	320	430	13	14	30	68	47.6	HF-86744
HF-86056	1/2	8	323	433	13	14	30	68	47.6	HF-86744
HF-86057	5/8	8	350	460	15.8	16	39.5	95	66.5	HF-86745
HF-86058	5/8	10	370	480	15.8	16	39.5	95	66.5	HF-86745
HF-86059-2	3/4	10	418	559	19	20	40.5	125	87.5	HF-86746-2
HF-86060-2	3/4	12	450	591	19	20	40.5	125	87.5	HF-86746-2